

Brewer Stealth Cowl Fitting Instructions


Important: the Stealth Cowl is for solid fuel use only




Ensure you have the correct model of terminal to match your fuel type and application.

The Stealth Cowl

Designed as an alternative to the Lobster Back, the Stealth Cowl has all the benefits of a swivel cowl to suit solid fuel systems, but with a much less visible profile.

Manufactured in Stainless Steel, the Stealth Cowl is powder coated black to enhance its distinctive sleek shape. Designed as both an ergonomic and stylish terminal, the Stealth Cowl can be fitted to a chimney to enhance the function of the chimney as well as the overall appearance of the property. It is available in two sizes: the Model 180 suits internal pot diameters between 115mm – 180mm; the Model 235 suits internal pot diameters between 175mm – 235mm.

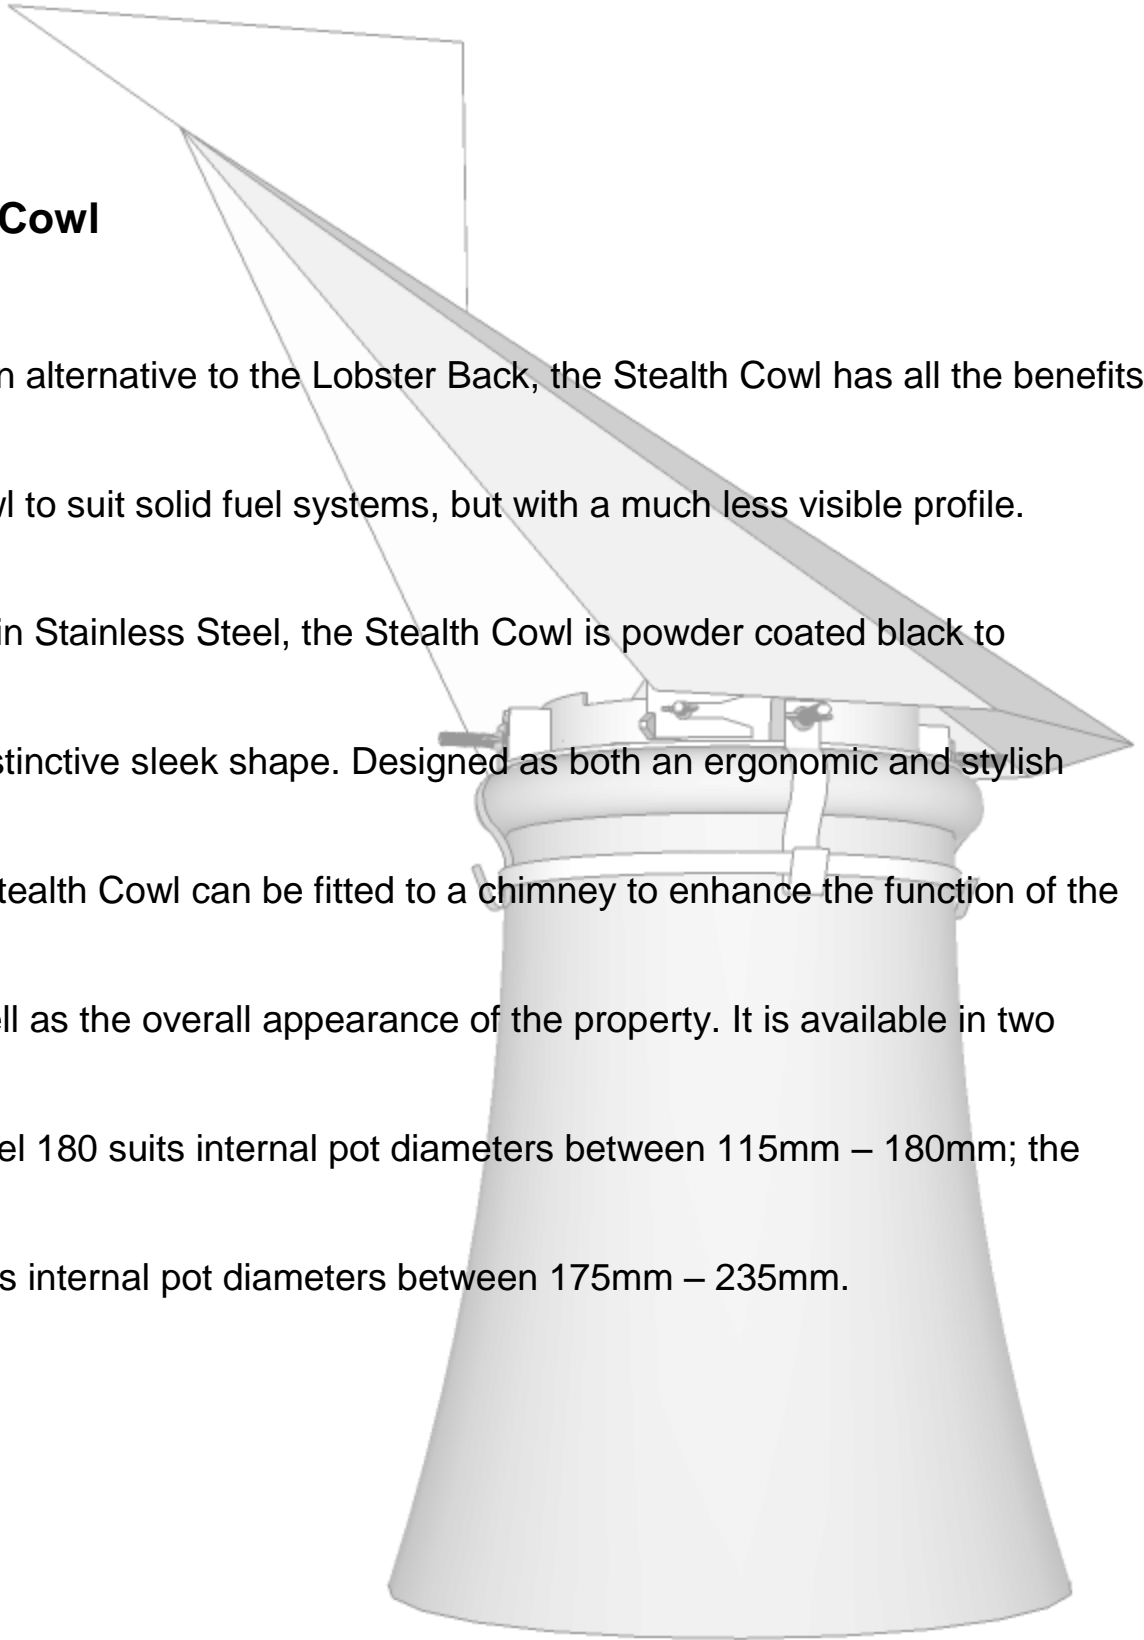

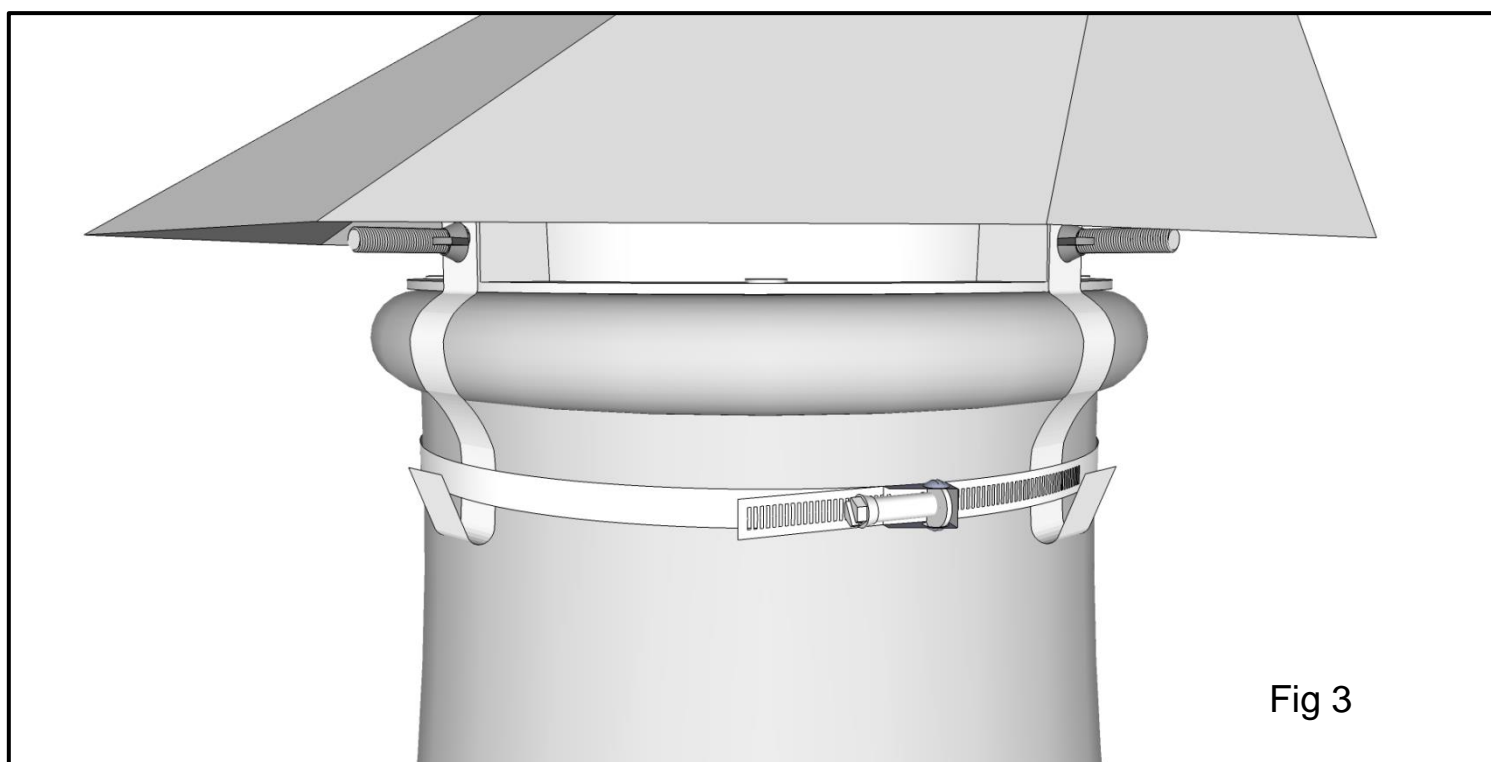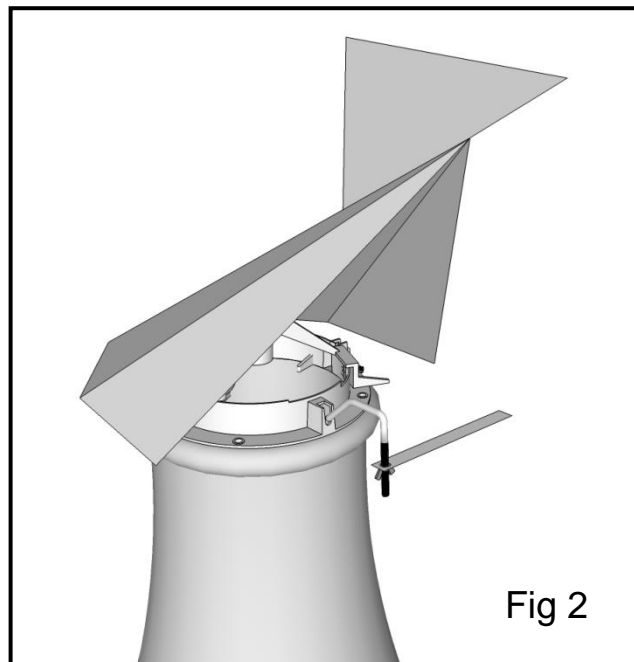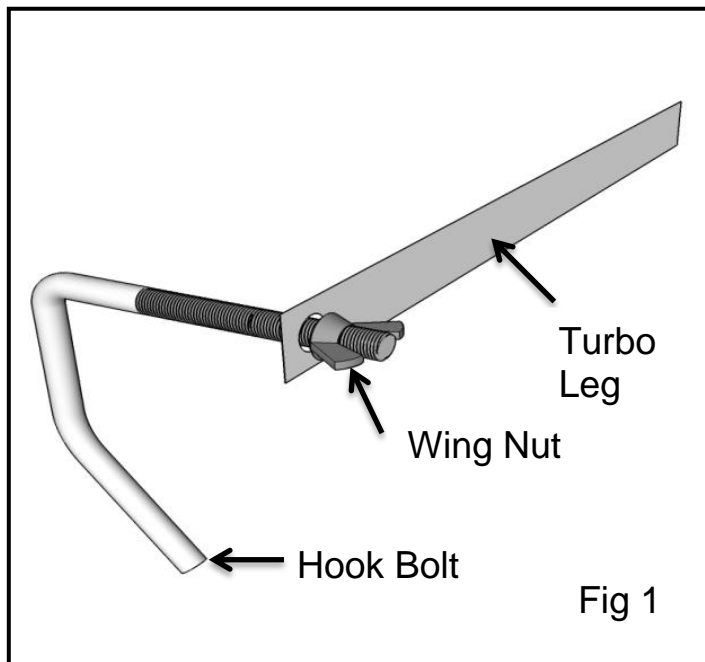

1. Screw the wing nuts slightly on to the threads so they do not come undone.
2. Pass the hook bolts through the holes in the turbo legs so the legs contact the wing nuts (fig1).
3. Pass the hook bolts through the openings on the supporting frame (wing nuts downwards fig2).
4. Place the unit on the chimney.
5. Tighten up the wing nuts so the unit is centred on the chimney.
6. Bend the Turbo Legs down the outside face of the chimney.
7. Pass the stainless steel band around the legs.
8. Position the stainless steel band approximately 50mm (2") above the lower edge of the legs.
9. Tighten the stainless steel band with a flat bladed screwdriver and bend the bottom of legs back upwards over the stainless steel band. Trim the legs if necessary (fig3).

Declaration of conformity

<p>Brewer Metalcraft Ltd Units C&D Ford Lane Industrial Estate Ford (Near Arundel) West Sussex BN18 0DF United Kingdom</p> <p>13</p>	
<p>1856-1:2009 Chimneys - Requirements for metal chimneys - Part 1: System chimney products</p>	
<p>Metal system chimney fitting - Terminal</p>	
<p>Essential Characteristic</p>	<p>Performance</p>
<p>Flow resistance Coefficient</p>	<p>ζ0.016</p>
<p>Durability: Freeze thaw</p>	<p>Pass</p>

Technical Information

Model	Stealth Cowl	
Fitting range (internal chimney diameter)	Model 150	115-180mm
	Model 200	180-235mm
Coefficient of flow resistance	ζ 0.016	